

# DV-IHB(IR2812Z)


2M Full-HD 네트워크 IR 볼렛 카메라



## A. 제품특성

- 모니터링 전용 카메라
- 1/2.8" Sony Starvis 2.07Mega Pixels Image Sensor
- 고해상도 1920x1080p 30fps 지원
- 2.8~12mm, 가변초점렌즈
- D-WDR, AGC, 3DNR, BLC
- IP66 방진방수 등급
- PoE(Power Over Ethernet) 지원
- Triple Streams 지원
- Onvif 지원

## B. 외관도

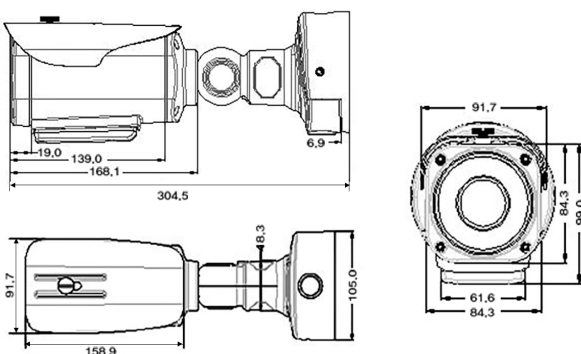

## C. 제품 사양

### Camera

Sensor	1/2.8" Sony Starvis 2.07Mega Pixels Image Sensor
Total Pixels	1945(H)x1109(V), 2.16 Mega Pixels
Effective Pixels	1945(H)x1097(V), 2.13 Mega Pixels
Lens(Focal Length)	2.8 mm ~ 12 mm (4.2x optical zoom)
FOV	H : 100 ° (wide)-31. ° (tele) V : 64 ° (wide)-23. ° (tele)
Iris	Auto, F1.2 ~ F2.1
Minimum Illumination	Color : 0.02 lux(Color), B/W : 0 lux (IR LED on)
Shutter	1/30 ~ 1/30000 sec.
S/N	>50dB
Day / Night	Auto(ICR), Day, Night, Manual

### Video

Video Compression	H.265, H.264, MJPEG
Resolution	1920x1080/1280x720/1024x768/704x576/ 704x480/640x480/320x240
Max. Frame Rate	30fps @ all resolution
Video Streaming	Triple
OSD	Support
Motion Detector	432 Zone (On/Off, 1-5 Step)
Privacy Area	16 Programmable Zones, On / Off
Noise Reduction	Off, 3DNR
Backlight Compensation	Off, D-WDR, BLC
White Balance	Auto, Indoor, Outdoor, Fluorescent
Lens Distortion Correction	Support
Defog	On, Off

### Audio

Compress Format	G.711 u-law
Two-way Talking	Support
AGC	Support

### Storage

Edge Storage(OPTION)	Micro SD, up to 32 GB
----------------------	-----------------------

### Built-in Illuminator

Working Distance	Up to 40m
Number of LEDs	6 IR LEDs

### Network

Protocols	TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS
Compatible Integration	ONVIF

### Interface

Audio I/O	1 Line-in / 1 Line-out
Network	RJ45, 10M/100M Base-TX Ethernet

### General

Power Supply	DC 12V / PoE Power consumption: 750mA
Dimensions (Ø x H)	Ø91.7 x 304.5 mm
Weight	Approx.2.0Kg
Working Environment	-20°C ~ +50°C (-4°F ~ 122°F), Humidity ≤ 90% RH(non-condensing)