

DV-UIHB(LIRF40)


8M UHD 네트워크 IR 볼렛 카메라



A. 제품특성

- 1/1.2" Progressive Scan CMOS
- 고해상도 3864×2218p 30fps 지원
- 4 mm, 고정렌즈, **F1.0 렌즈**
- **야간 칼라에 특화**(백라이트에 대한 선명한 영상화)
- BLC, HLC, 3D DNR
- IP67 방진방수 등급
- PoE(Power Over Ethernet) 지원
- Triple Streams 지원
- Onvif 지원

B. 외관도

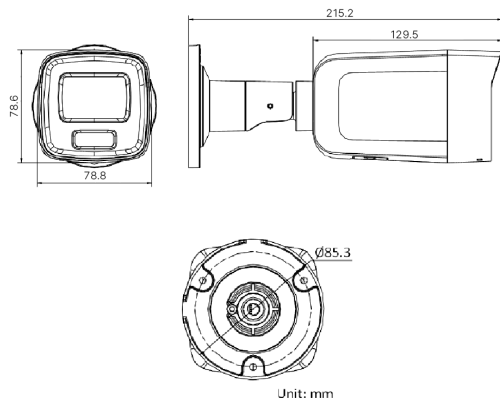

C. 제품 사양

Camera

Sensor	1/1.2" Progressive Scan CMOS
Total Pixels	3864(H)x2218(V), 8.57 Mega Pixels
Effective Pixels	3864(H)x2202(V), 8.51 Mega Pixels
Lens(Focal Length)	4mm, Fixed
FOV	H : 90.2°, V : 48.6°
Iris	F1.0, Fixed
Minimum Illumination	Color : 0.0005 lux(Color), B/W : 0 lux (IR LED on)
Shutter	1/3 s to 1/100,000 s
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Day / Night	Day, Night, Auto, Schedule

Video

Video Compression	Main stream: H.265/H.264/H.264+/H.265+ Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264
Video Bit Rate	32 Kbps to 16 Mbps
Bit Rate Control	CBR/VBR
Video Streaming	Triple
Motion detection	human and vehicle targets classification
Image Enhancement	BLC, HLC, 3D DNR

Audio

Audio Compression	-G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/ MP3/AAC
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC)
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
Environment Noise Filtering	Support

Built-in Illuminator

Working Distance	Up to 40m
Smart Supplement Light	Support

Network

Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP
Web Browser	Plug-in required live view: IE 10, IE 11 Plug-in free live view : Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+

Interface

On-board Storage	Built-in memory card slot, support microSD/ microSDHC/microSDXC/TF card, up to 256 GB
Network	1 RJ45 10 M/100 M self-adaptive Ethernet port

General

Power Supply	12 VDC ± 25%, 0.5 A, max. 6 W PoE : (802.3af, Class 3, 36 V to 57 V), 0.25 A to 0.15 A, max. 7.5 W
Dimensions (Ø x H)	215.2 mm × 78.8 mm × 78.6 mm
Weight	Approx.850g
Working Environment	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)