

DV-IHD(IRF28-H)


2M Full-HD 네트워크 IR 돔 카메라



A. 제품특성

- 1/2.7" Progressive Scan CMOS
- 고해상도 1920×1080p 30fps 지원
- 2.8mm, 고정초점렌즈
- BLC, HLC, 3D DNR
- IP67 방진방수 등급
- PoE(Power Over Ethernet) 지원
- Triple Streams 지원
- Onvif 지원

B. 외관도

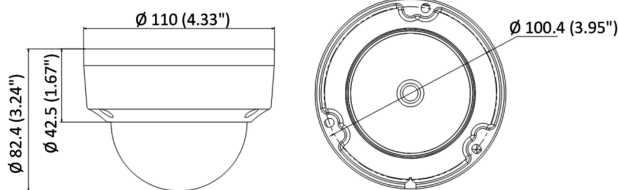

Unit: mm (inch)

C. 제품 사양

Camera	
Sensor	1/2.7" Progressive Scan CMOS
Total Pixels	1920(H)x1080(V), 2 Mega Pixels
Effective Pixels	1920(H)x1080(V), 2 Mega Pixels
Lens(Focal Length)	2.8 mm, Fixed
FOV	H : 112.1°, V : 60°
Iris	F2.0, Fixed
Minimum Illumination	Color : 0.01 lux(Color), B/W : 0 lux (IR LED on)
Shutter	1/30 ~ 1/100,000 sec.
Day / Night	Day, Night, Auto, Schedule
Video	
Video Compression	H.265, H.264, MJPEG
Resolution	1920×1080
Max. Frame Rate	30fps @ all resolution
Video Streaming	Triple
Motion Detector	Support
Image Enhancement	BLC, 3D DNR
Approval	
EMC	FCC SDoC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014); RCM (AS/NZS CISPR 32: 2015); IC VoC (ICES-003: Issue 6, 2016); KC (KN 32: 2015, KN 35: 2015)
Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013, IEC 62368-1:2014); BIS (IS 13252(Part 1):2010+A1:2013+A2:2015)
Environment	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
Protection	IP67 (IEC 60529-2013), IK10 (IEC 62262:2002)
Built-in Illuminator	
Working Distance	Up to 30m
IR Wavelength	850nm
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP™, SMTP, IGMP, 802.1X, QoS, IPv6, Bonjour, IPv4, UDP, SSL/TLS
Compatible Integration	ONVIF
Interface	
Audio I/O	1 Line-in / 1 Line-out
Network	1 RJ45 10 M/100 M self-adaptive Ethernet port
General	
Power Supply	12 VDC, 0.4 A, max. 5 W PoE: (802.3af, 36 V to 57 V), 0.2 A to 0.15 A, max. 6.5 W
Dimensions (Ø x H)	Ø 110 mm × 82.4 mm
Weight	Approx. 410g
Working Environment	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)