

# DV-SIHF(360Z)


12M SHD 어안형 네트워크 카메라



## A. 제품특성

- 1/1.7" Sony Starvis 12.76Mega Pixels Image Sensor
- 최대 12M Pixel(4000X3000) 고해상도
- Max 20fps 영상 전송
- 1.85mm 12m 어안렌즈
- Triple Codec (H.265/H.264/MJPEG)
- Corridor Mode 지원
- PoE(Power Over Ethernet) 지원
- 멀티스트림 지원
- Onvif 지원

## B. 외관도

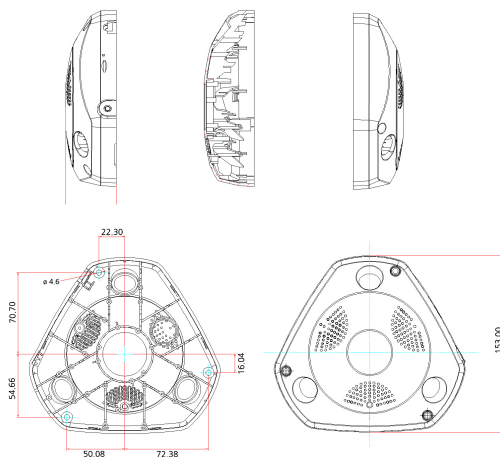

## C. 제품 사양

Camera	
Sensor	1/1.7" Sony Starvis 12.76Mega Pixels Image Sensor
Lens(Focal Length)	1.85mm 12M fish eye Lens
Scan System	Progressive Scan
Day & Night	Auto / Day(Color) / Night(BW)
Total Pixels	3864(H) x 2218(V), 8.57 Mega Pixels
Effective Pixels	4072(H) x 3046(V), 12.40 Mega Pixels
Minimum Illumination	0.08 lux(Color)
Privacy Area	8 Programmable Zones, On / Off
Motion Detection	432 Zone (On/Off, 1~5Step)
WDR	Real WDR On( Adjust ) / Off
DNR	2DNR, 3DNR, On( Adjust ) / Off
Defog	Detects Foggy, On( Adjust ) / Off
White Balance	Auto / Push / User
Elec. Shutter	Auto(1/30~1/30000), Suppress Rolling, Manual
Ext. Video	CVBS 1.0Vp-p 75Ω

Video	
Compress Format	H.264, H265, MJPEG
Resolution	4000x3000/3000x3000/3840x2160/2560x1920/2048x1536/1600x1200/1920x1080/1280x1024/1280x960/640x480/640x360/320x240/320x180
Max. Frame Rate	20fps @ all resolution
Video Quality	H.265/H.264 : Bit rate Control MJPEG : Quality Level Control
Streaming	Tripl Stream (Stream1,2,3) RTP/RTSP, UnicastRTP, Multicast RTP

Audio/Sensor	
Compress Format	G.711 u-law
Streaming	Two-way
Sensor In	1 ( NC / NO )
Alarm Out	1 (Digital Outut, Open Collector)

Network	
OS	Embedded Linux
Interface	RJ45 10/100 Base-T PoE
Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMTP,DNS,DDNS
Onvif	Support
Simultaneous Access	Max. 10 user

Web Browser	
Manager	IE 11이상, Firefox, Safari, Opera
Viewer	IE over 10ver (Active-X)

General	
Power Supply	DC12[V] ±10% / POE, Current Max 750mA
Operating Temp	0°C ~ +50°C
Preservation Temp	-10°C ~ +60°C
Humidity	0% ~ 90%
Dimension	153mm(W) X 43.45mm(H), without holder
Weight	Approx. 800 g