

DV-IHS(IR25X-H)


고성능 2M Full-HD 네트워크 IR PTZ 카메라



A. 제품특성

- 2MP 해상도의 고품질, 최대 60fps
- Power-by-DarkFighter 기술을 통한 탁월한 저조도 성능
- 120dB WDR 기술로 강력한 백라이트에 대비한 선명한 이미지
- Pan 및 tilt 기능을 통해 관심 영역을 모니터링
- 25배 optical 줌으로 넓은 영역에서 피사체를 더 가까이 볼 수 있음
- 최대 IR 50m, 야간 안전 보장
- 방수 방진 (IP66)
- 딥러닝을 기반으로 한 인적 및 차량 대상 분류에 초점
- 모니터링 전용 PTZ 카메라

B. 외관도

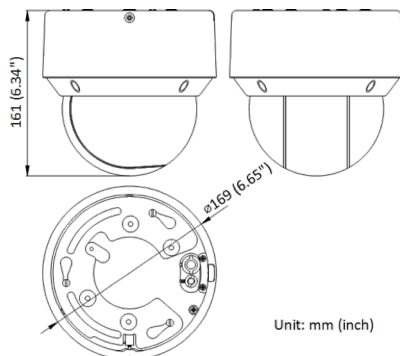

C. 제품 사양

Camera	
Sensor	1/2.8" Progressive Scan CMOS
Total Pixel	1920 × 1080
Zoom	25 × optical, 16 × digital
Video Signal-to-Noise	52 dB
Lens(Focal Length)	F1.5 ~ F3.5, f=4.8mm ~ 120mm
FOV	H : 54.9°(Wide) ~ 2.7°(Tele) V : 31.5°(Wide) ~ 1.5°(Tele)
Minimum Illumination	DSS On : 0.005 Lux @ Color, 0.001 Lux @ B/W 0 Lux with IR
Day & Night	Day, Night, Auto, Schedule
Focus	Auto, semi-auto, manual
Wide Dynamic Range (WDR)	120 dB
Zoom Speed	Approx. 3.4/s
Image Settings	Saturation, brightness, contrast, sharpness, gain, and white balance adjustable by client software or web browser
Image Enhancement	BLC, HLC, 3D DNR
DE-FOG	Digital Defog
Aperture	Max. F1.6
Face Capture	Detects up to 5 faces simultaneously, Supports detecting, tracking, capturing, grading, selecting of face in motion, and outputs the best face picture
Privacy Mask	24 programmable polygon privacy masks, mask color or mosaic configurable
Fan / Tilt Range	Fan : 0°~360° / Tilt : -5°~90°
Fan Speed	Pan speed: configurable from 0.1° to 300°/s preset speed: 350°/s
Tilt Speed	Tilt speed: configurable from 0.1° to 160°/s preset speed 200°/s
Preset / Pattern	300 Presets / 4 pattern scans, record time over 10 minutes for each scan
Patrol Scan	8 patrols, up to 32 presets for each patrol
Web Browser	IE 10 to 11, Chrome 57+, Firefox 52+, Safari 11+
Protocol	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, Bonjour, WebSocket, WebSockets
Alarm I/O	2 inputs, 2 outputs
Audio I/O	1 input (line in) / 1 output (line out)
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
Supplement Light Range	IR Distance: up to 50 m
IR Wavelength	850nm
Working Environment	-30°C ~ 65°C / -22°F ~ 149°F
Dimensions	Ø 169 mm × 161 mm (Ø 6.65" × 6.34")
Certification	IP 66
Weight	Approx. 2.45 kg (5.40 lb.)
Power Supply	12 VDC, Max. 24 W; PoE (802.3at)

Video	
Simultaneous Access	Up to 32 users
Video Compression	H.265+/H.265/H.264+/H.264
Resolution	1920 × 1080, 1280 × 960, 1280 × 720
Max. Frame Rate	up to 60 fps
Video Streaming	Triple Stream