

# DV-IHZ(36X)


2메가픽셀, 1/1.9" 초저조도 HD IP 줌 박스 카메라



## A. 제품특성

- 초저조도 HD IP 줌 박스 카메라
- 1/1.9" 소니 CMOS 센서
- MAX.1920x1080p (30/25 FPS)
- 광학 x36 & 디지털 x32
- DSS On : 0.0375 Lux @ Color, 0.002 Lux @ B/W
- Day & Night, 안개 보정
- 3 모션 디텍션 포지션
- 24 프라이버스 마스크
- 1센서 입력 & 1알람 출력
- RS-485, PoE 지원
- H.265, H.264, M-JPEG
- MAX. 30FPS @ ALL Resolutions
- 양방향 오디오 통신

## B. 외관도

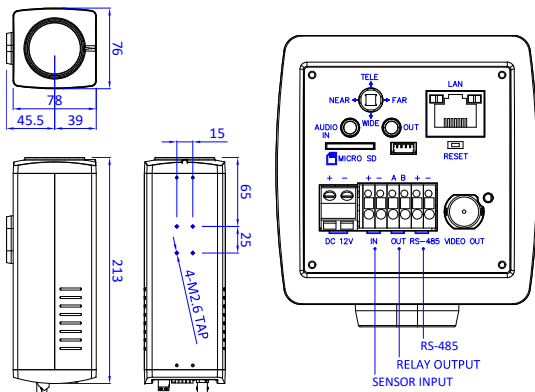

## C. 제품 사양

Camera	
Sensor	1/1.9" Sony CMOS sensor
Total Pixel	2,120K pixel
해상도	MAX. 1920 × 1080p (30/25FPS)
Zoom	광학 x36, 디지털 x32
S/N비	50 db 이상
Focal Length	F1.5 ~ F4.8, f=6mm ~ 216mm
FOV	H : 56.5°(Wide) ~ 2.12°(Tele), V : 33.63°(Wide) ~ 1.19°(Tele)
Minimum Illumination	DSS Off : 0.15 Lux @ Color, 0.01 Lux @ B/W DSS On : 0.0375 Lux @ Color, 0.002 Lux @ B/W
Day & Night	Auto / Day / Night(ICR)
Focus	Auto / Manual / One-Push
AE Mode	Auto / Iris / Shutter / Manual
AGE / Flickerless	ON / OFF
Shutter Speed	1/30(25) ~ 1/30,000 [SEC.]
DSS	Off / MAX. x2 ~ x4
Iris / Brightness	0~20
White Balance	Auto / One-Push / Manual / Indoor / Outdoor
BLC / WDR / HLC / DE-FOG	On / Off
샤프니스	0~10
DNR	Auto / Off / Low / Middle / High
Motion Detection	3 Position
Privacy Mask	24 mask
OSD menu	영어, 중국어(간체), 중국어(번체), 일본어
Ethernet	Ethernet 10/100 Base-T (RJ-45)
Video Output	CVBS, 1Vp-p
Audio I/O	Mono Jack, Line In/Out
Memory	Micro SD
Serial port	RS-485, Pelco-D
Sensor	1 입력, 포토-커플러 타입
Alarm Output	1 출력, 릴레이 출력, MAX. Load DC 24V, 1A / AC 125V, 0.5A
동작온도	-10°C ~ 50°C / 14°F ~ 122°F
Dimension	76(W) x 78(H) x 213(L) [mm] / 3(W) x 3.1(H) x 8.4(L) ["]
Weight	1.2 Kg / 2.7 lb
PoE(Power over Ethernet)	802.3af
입력 전원	DC 12V, 0.8A or PoE

Network	
System OS	Embedded linux
Protocol	TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS
ONVIF / DDNS	Support
동시 접속자수	최대 10 사용자
비디오 압축 포맷	H.265, H.264, M-JPEG
비디오 해상도	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 640x480, 320x240
비디오 프레임 레이트	MAX. 30FPS @ All Resolutions
비디오 화질 제어	H.265 & H.264 : Bitrate Control / M-JPEG : Quality Level Control
비디오 스트리밍	Triple Stream (Stream 1, 2, 3), RTP/RTSP, Unicast RTP, Multicast RTP
오디오 압축 포맷	G.711 u-Law
오디오 스트리밍	양방향
웹 브라우저 OS	Windows 7, 8, 10
웹 브라우저 매니저	IE11, Firefox, Safari, Opera
웹 브라우저 뷰어	IE11 or Higher (Active-X)